






SPIRIT FOLIO RAC PAC

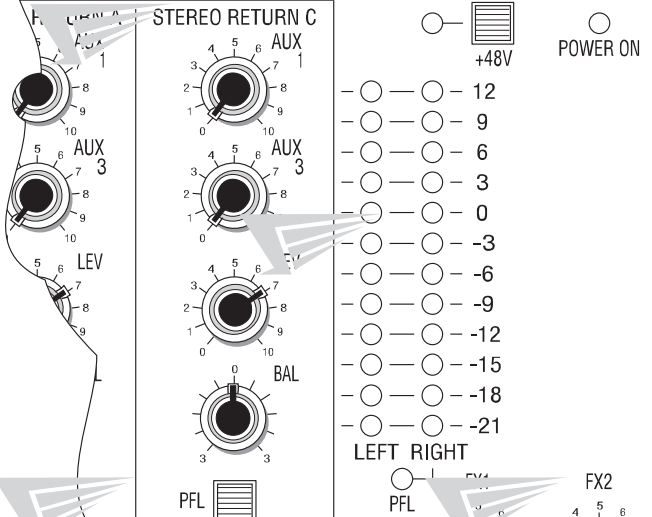

Contents

SPIRIT FOLIO RAC PAC

Connections	1
The Controls in Detail -	
Mono Input	3
Stereo Input	6
Stereo Returns	8
Master Section	10
Technical Specifications	13
System Block Diagram	15

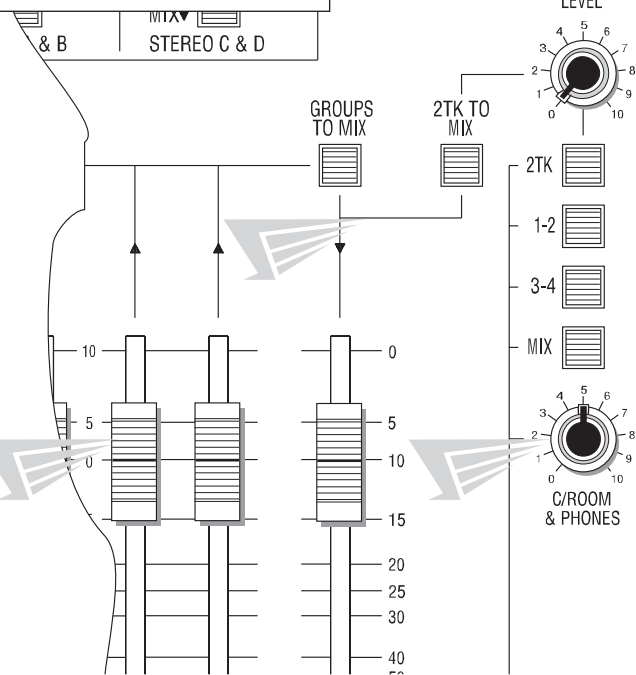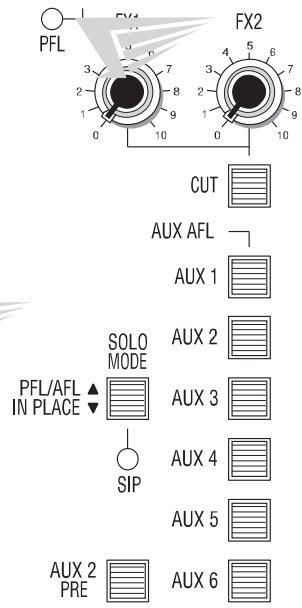

SPIRIT FOLIO RAC PAC

PRODUCT GUIDE

TECHNICAL SPECIFICATION

OUTPUT NOISE

Typical Group Output, Input faders down	-87dBu
Group fader down	-92dBu
Mix output with groups routed to mix	-83dBu
Mix fader down	-98dBu

AUX NOISE

Typical, input sends down	-85dBu
---------------------------	--------

E.I.N.

150R source	-129dBu
-------------	---------

DISTORTION

Mic gain 30dB, to group output @ 14dBu	< 0.005%
----------------------------------------	----------

CROSSTALK @1kHz

Input fader attenuation (top to bottom)	>95dB
Aux send attenuation	>88dB
Adjacent channel	>92dB

FREQUENCY RESPONSE

20Hz - 20kHz	
Line input, via group, to mix output	+/-1dB

INPUT & OUTPUT IMPEDANCES

Mic	2k Ω
Line	10k Ω
Outputs	75 Ω

INPUT & OUTPUT LEVELS


Max mic input	+16dBu
Max line input	+28dBu
Any output	+22dBu
Headphones	150mW into 600 Ω

WEIGHT

Console	Power Pack
6.6 Kg	1.0 Kg

DIMENSIONS

All dimensions are in millimetres

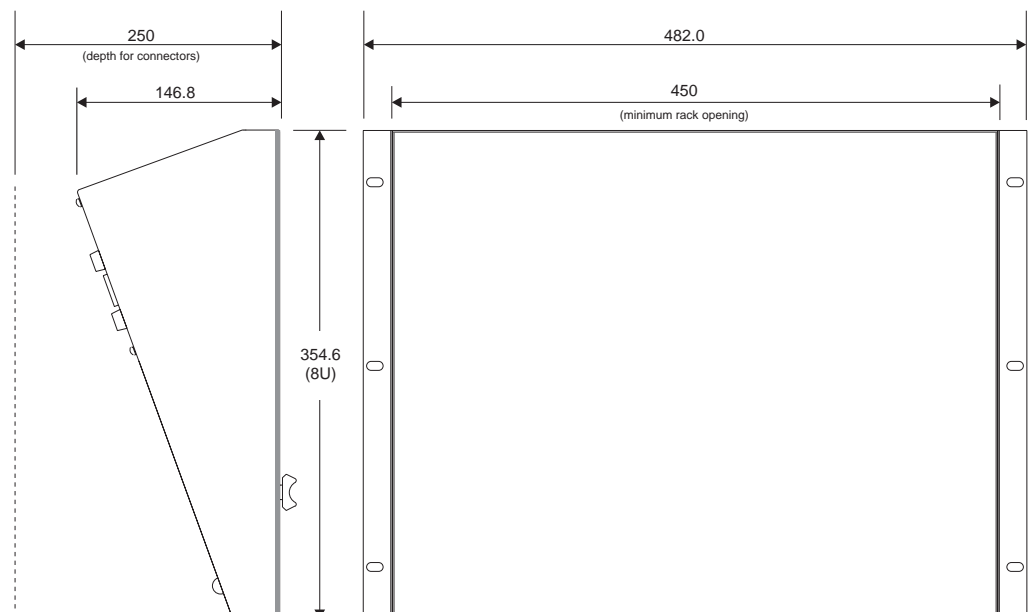

SYSTEM BLOCK DIAGRAM

