


FOLIO
Powerpad
.....

USERS
GUIDE

Dimensions

All dimensions are in millimetres (inches in brackets)

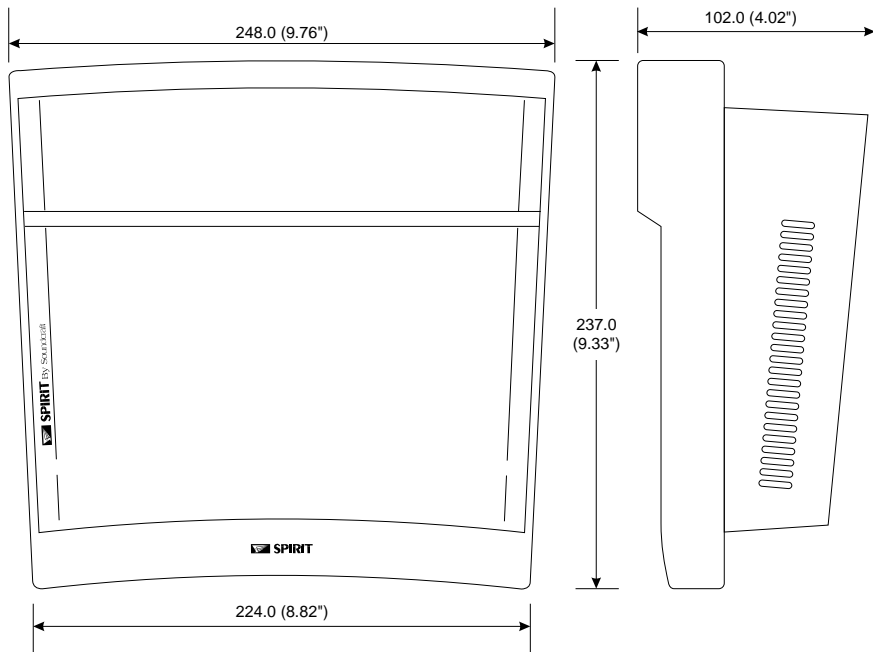

Specifications

Noise

E.I.N., 150Ω source impedance	-128.5dBu
Output	-84dBu
Aux Out (inputs down)	-80dBu
Mix, masters at max.	-80dBu

Crosstalk

Fader cutoff (rel 0 mark)	> 90dB
Aux Send	> 90dB
Pan Isolation	> 75dB

Frequency Response

20Hz - 20kHz rel. 1kHz, Line In to Master Mix -1dB

THD

Mic sens. -30dBu, +14dBu at mix output <0.005%

Inputs

Mic Input	Input Impedance	1.8kΩ
	Max input	+14dBu
	Max Mic Gain to Output	68dB
Line Input	Input Impedance	20kΩ
	Max input	> +30dBu
Stereo Input	Input Impedance	20kΩ

Output

Max. Output (Aux, Mix, typical)	+21dBu
Power Output (into 4Ω, RMS)	2 x 35W

Connectors

All jacks are 3-pole TRS 'A' gauge	
Mic (balanced or unbalanced)	XLR
Line (balanced or unbalanced)	Jack
Stereo Input, Tape In (unbalanced)	
Monitor Amp Out	RCA Phono
FX Return (balanced or unbalanced)	Jack
Master Mix Out, Aux Out, (imp. balanced)	Jack
Headphone	Stereo Jack
Loudspeakers	Jack
Weight	4.2 kg
	9.2 lb



SPIRIT

By Soundcraft

Spirit By Soundcraft™
Harman International Industries Ltd., Cranborne House,
Cranborne Road, Potters Bar, Herts., EN6 3JN U.K.
Tel: +44 (0) 1707 665000 Fax: +44 (0) 1707 660742

Soundcraft US,
Air Park Business Center 12,
1449 Donnelson Pike, Nashville, TN 37217, USA.
Tel: (615) 360 0471 Fax: (615) 360 0273



This equipment complies
with the EMC Directive
89/336/EEC

For further details contact the address on the left

H A Harman International Company

<http://www.spiritbysoundcraft.com>